



PRE OILED TIMBER DECKING

Pre-oiling is a controlled factory applied single coat of Intergrain Universal Timber Oil to your timber.

To fully protect your pre-oiled timber, apply a top coat of your chosen water or oil based finish within 8 weeks of installation.

PRE-OILED ADVANTAGE



360

360° PROTECTION

- Pre-oiling protects all sides
- Better protection during transport, site storage and installation



UNLOCKED TECHNOLOGY

- Compatible with most water or oil based finishes



DEEPLY PENETRATING

- Protects the structural integrity of the timber
- Reduces warping, cupping or splitting
- Minimised moisture absorption




SAVES TIME

- No need to weather the timber, simply clean and coat
- Less prep, no sanding. Saves time on site
- Less dependence on weather conditions



PARKSIDE
TIMBER

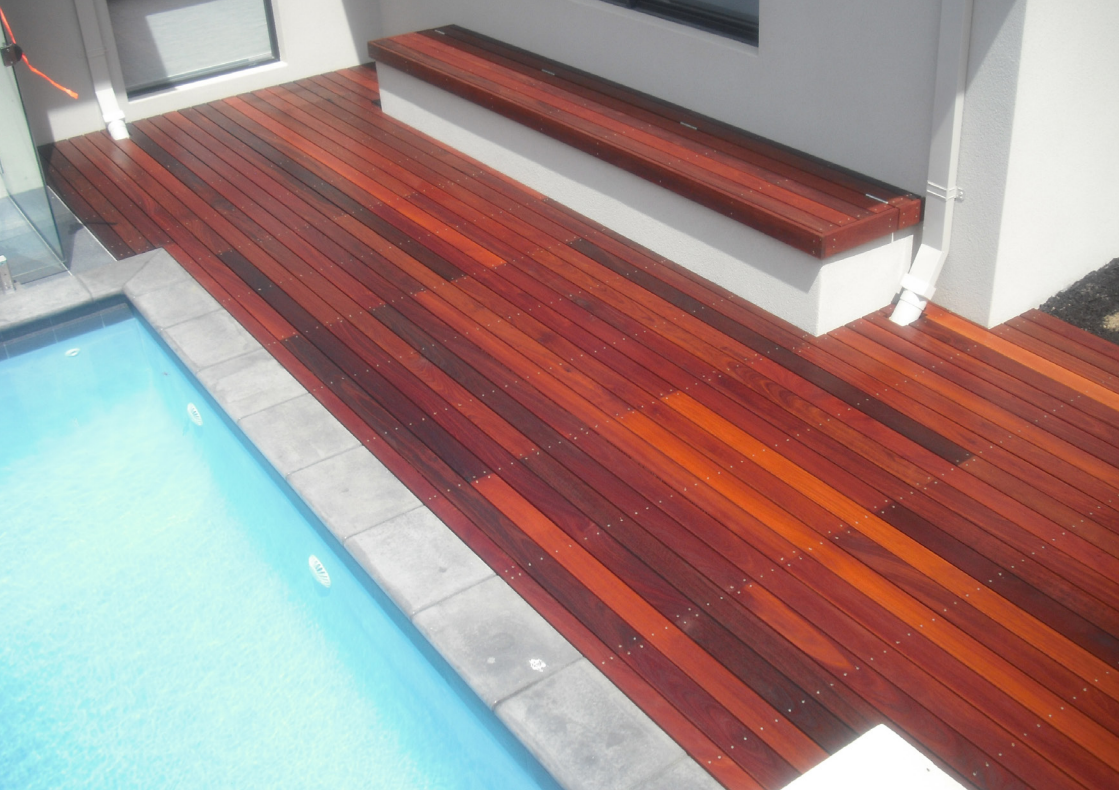

TWO STEPS FOR LASTING PROTECTION:

1. **Clean:** ensure surface is clean. If required, thoroughly scrub with Timber Cleaner.
2. **Coat** once dry, apply 2 coats of your chosen oil based or water based finish. Do not apply a mineral oil based finish.

FOR LONG TERM PROTECTION:

1. Conduct regular maintenance inspections to ensure your coating is still repelling water and the finish is in sound condition.
2. If maintenance is required, thoroughly scrub with Timber Cleaner and apply a fresh coat.